

REV.	ECN.NO.	DATE
A	RELEASED	10/11/07
B	Modify Notes	09/22/08
C	Modify Drawing	10/06/08

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
 Shield: Brass.
 Plating: Nickle Plating .
 Contact: Brass.
 Plating: Tin Plating On Solder Tail.
 Gold Plating Over Nickel on Contact Area;

*Electrical Specification


Operation Voltage: 40 VAC max.
 Current Rating: 0.5 Ampere per contact
 Contact Resistance: 30 Milliohms max.
 Insulation Resistance: 100 Megohms min.
 Dielectric Withstanding Voltage: 500 VDC

*Environmental


Operating Temperature: -20°C to +85°C

*How To Order


Series NO. WDPE-20 F 3 L 1 B U 3
 Number of Contacts
 Gold A:Flash
 D:15u" F:30u"
 3: SMT Type
 3:Tray 5:Reel
 Blank:No Mark
 U:Lead Free
 B:Brass
 1:Black
 L:LCP

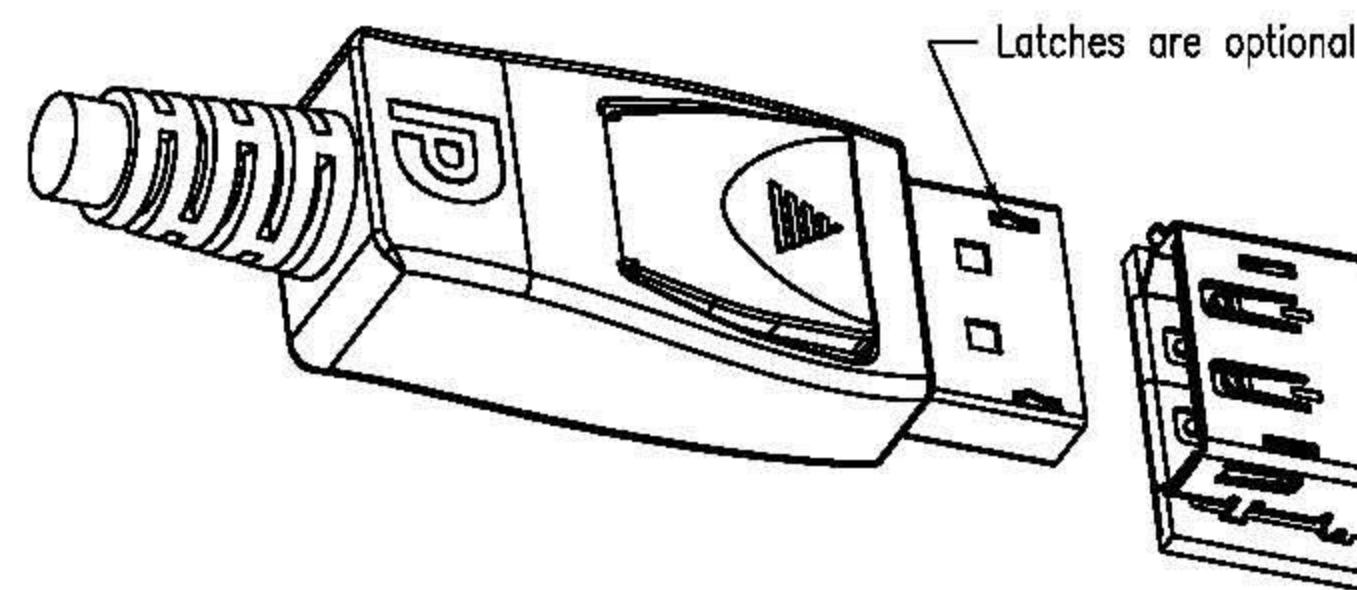

Cable 3D

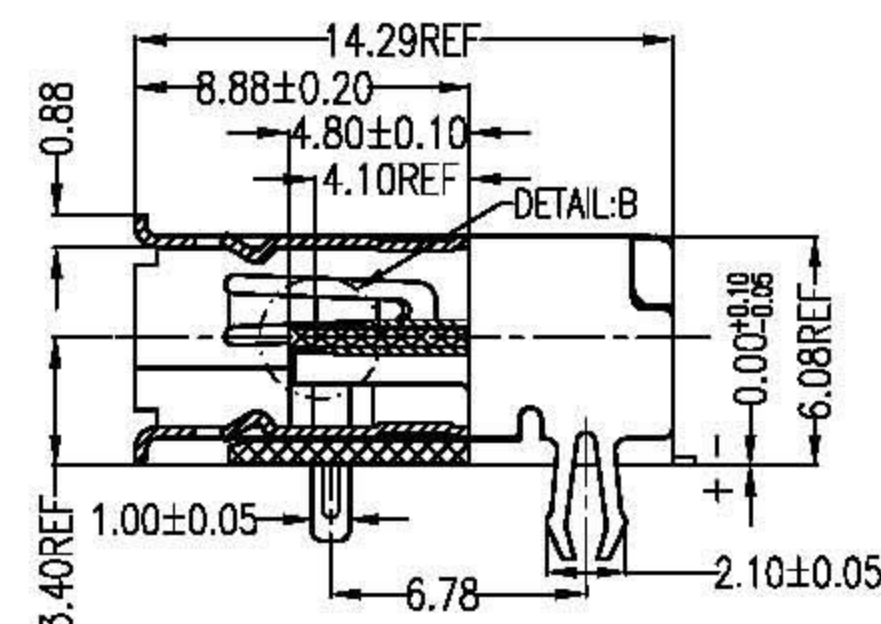

SECT A-A

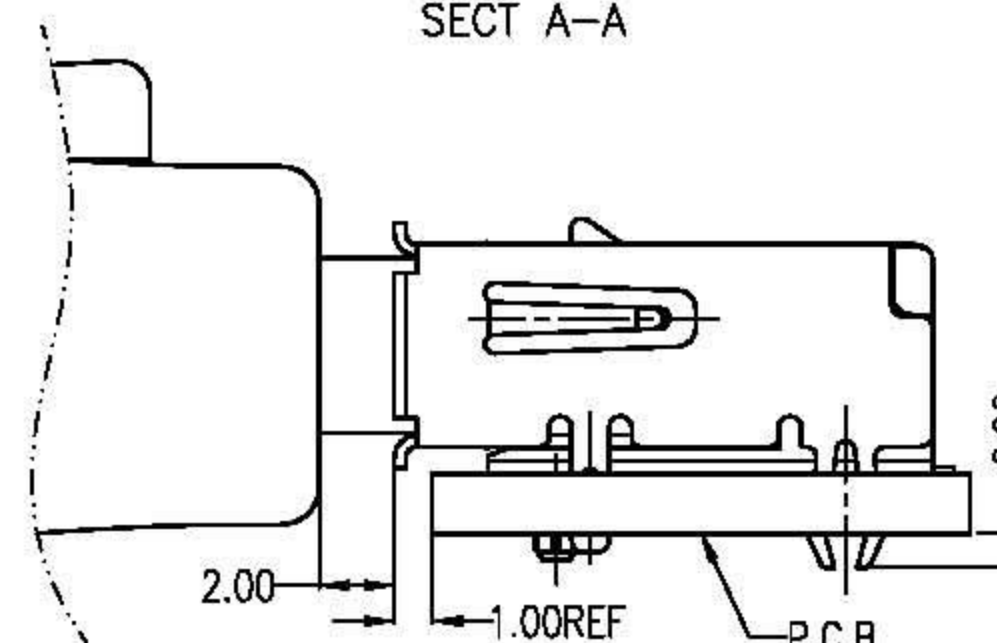

Fully mated condition

REV	Modify Drawing	Drawing By	Date	Pcidv Electronics Co.,Ltd			
Units	MM	Scale	1:1	Reviewed By	Date	Date	10/06/08
Tolerance Unless Otherwise Specified				Approval By	Date	Sheet	1 of 1
.X	~	±0.38				Third Angle Projection	
.XX	~	±0.25					
.XXX	~	±0.20					
Angle	~	± 3°					
				Drawing No.	WDPE-20PS-AN-M025	REV	C

